


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01S 15/00	A1	(11) International Publication Number: WO 98/26309 (43) International Publication Date: 18 June 1998 (18.06.98)
(21) International Application Number: PCT/US97/20940 (22) International Filing Date: 14 November 1997 (14.11.97) (30) Priority Data: 08/763,377 13 December 1996 (13.12.96) US (71) Applicant (for all designated States except US): SOLID SCIENTIFIC RESEARCH AND DEVELOPMENT LTD. [IL/IL]; King George Street 47, 63299 Tel Aviv (IL). (71) Applicant (for TJ only): FRIEDMAN, Mark, M. [US/IL]; Alharizi 1, 43406 Ra'anana (IL). (72) Inventor; and (75) Inventor/Applicant (for US only): FREGER, David [IL/IL]; Rambam 6/8, 78625 Ashkelon (IL). (74) Common Representative: FRIEDMAN, Mark, M.; c/o Anthony Castorina, Suite 207, 2001 Jefferson Davis Highway, Arlington, VA 22202 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: METHOD AND DEVICE FOR ULTRASONIC RANGING**(57) Abstract**

A method and device for ultrasonic ranging. As in prior art devices, ultrasound pulses are transmitted by the device (70) towards a target, and echo pulses (50) from the target are received. The timing of the maximum (52) of the amplitude envelope (54) of the echo pulses is picked and used as a measure of the return time of these pulses. This maximum envelope time is relatively independent of the speed of sound between the device and the target. Preferably, the duration of the echo pulses is less than the response time of the receiving circuit, to enable an accurate pick of the amplitude envelope maximum.

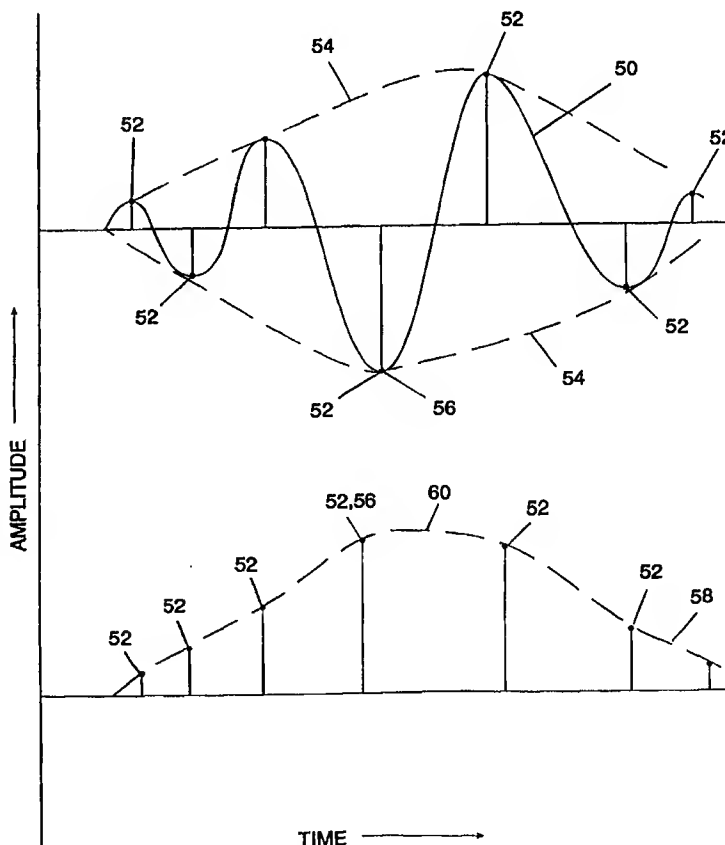

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND DEVICE FOR ULTRASONIC RANGING

FIELD AND BACKGROUND OF THE INVENTION

5 The present invention relates to a method and device for inferring the distance to a target from the travel time of an ultrasonic pulse and, more particularly, to a method and device for measuring the distance to a target based on the time of arrival of the peak energy of an echoed pulse.

10 The use of ultrasound for rangefinding is well-known in the art. A pulse of ultrasound is transmitted towards a target, starting at an initial time T_0 . An echo pulse from the target is detected, starting at a later time T_1 . The round trip travel time, $T_1 - T_0$, multiplied by the speed of sound in the medium through which the pulse propagates, gives twice the distance to the target.

15 This rangefinding method suffers from several sources of uncertainty, as illustrated in Figure 1.

Figure 1 shows two sources of error in determining the time T_1 at which the echo returns to the point of transmission. An echo waveform **10** is detected within a background of ambient noise having an RMS amplitude level labeled by the reference numeral **12**. To be certain that incoming ultrasonic energy really is an echo pulse, and not noise, a received signal is ignored until its amplitude exceeds a threshold **14** that is considerably higher than the ambient noise. The time T_2 of the zero crossing **16** following the first detected amplitude that exceeds noise amplitude level **12** is used as the measured value of T_1 . As can be seen in Figure 1, T_2 includes two sources of error: the initial part of waveform **10** (in this example, two cycles of waveform **10**), whose amplitude is less than threshold **14**, is ignored; and the zero crossing at time T_2 is even later than the onset of a signal that is above threshold **14**. These sources of error are most important at short ranges.

20
25

Another source of error is associated with the fact that the speed of sound through the medium of propagation may vary unpredictably. For example, if the transmitting medium is air, the speed of sound depends on air pressure, air temperature, and humidity along the path of sound propagation. If the air along the

30

path of sound propagation were homogeneous, then the measuring device could be provided with pressure, temperature and humidity sensors to provide readings of pressure, temperature and humidity to be used to compensate for those variations. However, homogeneity of the medium of propagation cannot be guaranteed.

5 There is thus a widely recognized need for, and it would be highly advantageous to have, a method of ultrasonic ranging that is more immune to ambient noise and to variations in sound speed than the presently known method.

SUMMARY OF THE INVENTION

10 According to the present invention there is provided a method for measuring a distance to a target, comprising the steps of: (a) transmitting an ultrasound pulse towards the target; (b) receiving an echo pulse, having an amplitude envelope, from the target; and (c) picking an arrival time of a maximum of the amplitude envelope.

 According to the present invention there is provided an ultrasonic rangefinder,
15 comprising: (a) a transmitter of ultrasound pulses; (b) a sensor responsive to echoes of the pulses; (c) an amplifier receiving signals from the sensor; (d) an amplitude maximum detector receiving signals from the amplifier; and (e) a timer, operationally connected to the transmitter and to the receiver, whereby a time delay, between a transmission of one of the ultrasound pulses and a response of the amplitude maximum
20 detector, is measured.

 The principle upon which the present invention is based is illustrated in Figure 2. The sensors used to detect ultrasonic echoes, whether those sensors be piezoelectric or magnetostrictive, all respond nonlinearly to the onset of ultrasonic energy. These sensors are characterized by a response time that is shorter for high-
25 energy signals than for low-energy signals. Furthermore, the energy level of echo pulses propagating through air tends to vary in the opposite sense of the velocity of propagation: for a given level of transmission energy, an echo pulse returning through "slow" air tends to have a higher energy content than an echo pulse returning through "fast" air. Figure 2 shows three echo pulses from a target through air of three different
30 propagation velocities, as received by a receiving circuit. Echo pulse 20 returns through "fast" air. Echo pulse 30 returns through "average" air. Echo pulse 40

returns through "slow" air. The initial times of arrival of pulses 20, 30 and 40 differ accordingly, as shown; but because pulse 40 has higher energy than pulse 30, which in turn has higher energy than pulse 20, the receiving sensor responds more quickly to pulse 40 than to pulse 30, and more quickly to pulse 30 than to pulse 20.

5 Consequently, the amplitude envelopes of the pulses, envelope 22 of pulse 20, envelope 32 of pulse 30, and envelope 42 of pulse 40, have their maxima at approximately the same time. Therefore, a range measurement based on picking the maximum of the amplitude envelope of the received echo pulse is relatively immune to variations in sound speed. In addition, the maximum amplitude generally greatly

10 exceeds the ambient noise level, making the method of the present invention immune to the systematic errors associated with picking the initial zero crossing of the echo pulse.

In order for the maximum of the amplitude envelope to be picked reliably, the echo pulse preferably is shorter than the response time of the receiving sensor. In

15 longer pulses, the location of the maximum of the amplitude envelope tends to be ambiguous. If the receiving sensor has a response time shorter than the length of the echo pulse, then the receiving circuit can be provided with an effective response time that is longer than the pulse length, by including, in the receiving circuit, a suitable nonlinear device such as a bandpass filter.

20 Because the sensor response, upon which the present invention is based, varies among sensor types, a rangefinder built according to the principles of the present invention must be calibrated by transmitting ultrasonic pulses towards calibration targets at known distances and measuring the times of maximum amplitude of the received echo pulses. This calibration preferably includes a measurement of the

25 amplification level in the receiving circuit that is just short of the saturation level of the receiving circuit, at each calibration distance. This provides a table of optimum amplification levels vs. distance. In actual use, the rangefinder measures distance to a target using at least two transmitted pulses. The first pulse is used to get a rough estimate of distance to the target. The amplification level is adjusted to match this

30 estimate, so that as high an amplitude as possible can be used for picking the maximum

of the echo envelope without saturating the receiving circuit. Then a second pulse is transmitted, for the actual distance measurement.

Alternatively, amplitude measurement and feedback may be provided to reduce the receiver amplification if the received echo signal saturates the receiver circuit.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1 (prior art) illustrates the picking of the first zero crossing of an echo pulse;

10

FIG. 2 shows three echo pulses as received by the receiver circuit of the present invention after propagation to and from the same target but through media (air) of different propagation velocities;

15

FIG. 3 illustrates two algorithms for picking the maximum of the amplitude envelope of an echo pulse;

FIG. 4 is a block diagram of a basic rangefinder according to the present invention;

FIG. 5 is a block diagram of a rangefinder according to the present invention that includes a nonlinear device for adjusting the response time of the receiver circuit;

20

FIG. 6 is a block diagram of a rangefinder according to the present invention that includes a feedback mechanism for adjusting the receiver circuit amplifier in accordance with an estimated distance to the target;

FIG. 7 is a block diagram of a rangefinder according to the present invention that includes a feedback mechanism for adjusting the receiver circuit amplifier in accordance with the received amplitude;

25

FIG. 8 is a block diagram of a rangefinder according to the present invention in which the transmitting transceiver and the receiving sensor are identical.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

30

The present invention is of a method and device for ultrasonic rangefinding. Specifically, the present invention can be used to measure accurately the distance to a

target, in the presence of relatively high ambient noise, despite variations in the speed of sound between the device and the target.

The principles and operation of an ultrasonic rangefinder according to the present invention may be better understood with reference to the drawings and the
5 accompanying description.

Referring now to the drawings, Figure 3 shows a received echo pulse 50, showing that each half-cycle of pulse 50 features a point of maximum absolute amplitude 52. The simplest way to pick the time of the maximum of the amplitude envelope 54 of pulse 50 is to pick the time of the largest maximum absolute amplitude
10 56. Distances measured in this way are uncertain by one quarter of the ultrasound wavelength. A more accurate distance measurement can be obtained by fitting a smooth curve 58 to the maximum absolute amplitudes, as shown, and picking the maximum 60 of curve 58.

Figure 4 is a block diagram of a basic rangefinder according to the present
15 invention. A transmitter 70 includes a signal generator 72 and an ultrasound transducer 74. Signal generator 72 generates waveforms that are transmitted as pulses of ultrasound by transducer 74. Echo pulses returning from the target are received by a receiver circuit 80 that includes a sensor 82, an amplifier 84, an amplitude detector 86, a peak amplitude detector 88, and a timer 90. The arrows show the direction of
20 signal flow. Sensor 82 receives ultrasound energy and transforms it into electrical signals, which are amplified by amplifier 84 and passed on to amplitude detector 86. Peak amplitude detector 88 responds to signal maxima 52, from amplitude detector 86, that exceed a threshold such as threshold 14 of Figure 1, and signals timer 90 when maxima 52 are received, as long as the associated amplitudes are increasing. The last
25 such timing signal from peak amplitude detector 88 is the one associated with largest maximum absolute amplitude 56. Timer 90 also receives a timing signal from signal generator 72 during the transmission of the outgoing ultrasound pulse. Preferably, this signal is sent from signal generator 72 to timer 90 when signal generator 72 begins to generate the transmitted waveform; but other fiducial points of the transmitted
30 waveform, such as the first peak or the first zero crossing, also may be used to mark the nominal start of transmission. Timer 90 includes circuitry for inferring the distance

to the target, based on the time difference between the timing signal from signal generator 72 and the last timing signal from peak amplitude detector 88. A signal representative of this difference is sent to other devices (not shown) such as a display.

Figure 5 is a block diagram of a rangefinder according to the present invention, similar to the rangefinder of Figure 4, in which a non-linear device 92 such as a bandpass filter is interposed between amplifier 84 and amplitude detector 86. The purpose of non-linear device 92, as described above, is to ensure that the response time of receiver circuit 80 is greater than the duration of the signals transmitter 70, even if the response time of sensor 82 itself is shorter than those signals.

Figure 6 is a block diagram of a rangefinder according to the present invention, similar to the rangefinder of Figure 4, in which a feedback mechanism, symbolized by arrow 94, is provided for controlling the amplification level of amplifier 84, as described above, to keep largest maximum amplitude 56 just below the saturation level of receiver circuit 80. Figure 7 is a block diagram of a rangefinder according to the present invention, similar to the rangefinder of Figure 6, except that a feedback mechanism 96 is provided to adjust the amplification level of amplifier 84 based on the amplitudes actually measured by amplitude detector 86. Finally, Figure 8 is a block diagram of a rangefinder according to the present invention, similar to the rangefinder of Figure 4, in which the same physical device 100 (e.g., the same piezoelectric crystal) is used as both the transducer of transmitter 70 and the sensor of receiver circuit 80. The advantages of using the same physical device for both the transducer of transmitter 70 and the sensor of receiver circuit 80 is that the rangefinder then is both more compact and more economical to produce than a rangefinder with a separate transducer 74 and sensor 82.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications and other applications of the invention may be made.

WHAT IS CLAIMED IS:

1. A method for measuring a distance to a target, comprising the steps of:
 - (a) transmitting an ultrasound pulse towards the target;
 - (b) receiving an echo pulse, having an amplitude envelope, from the target;
and
 - (c) picking an arrival time of a maximum of said amplitude envelope.
2. The method of claim 1, wherein said echo pulse includes a plurality of half-cycles, each of said half-cycles having a maximum absolute amplitude, said measure of said maximum of said amplitude envelope being a largest of said maximum absolute amplitudes.
3. The method of claim 1, wherein said echo pulse includes a plurality of half-cycles, each of said half-cycles having a maximum absolute amplitude, said maximum of said amplitude envelope being determined by fitting a smooth curve to said maximum absolute amplitudes as a function of time.
4. The method of claim 1, wherein said receiving is effected using a receiver circuit having a saturation level and an amplification level, the method further comprising the step of:
 - (d) if said maximum of said amplitude envelope exceeds said saturation level: decreasing said amplification level.
5. The method of claim 1, wherein said receiving is effected using a sensor having a sensor response time, and wherein said echo pulse has a pulse duration shorter than said sensor response time.
6. The method of claim 1, wherein said echo pulse has a pulse duration, wherein said receiving is effected using a receiver circuit having an adjustable circuit response time, the method further comprising the step of:

- (e) adjusting said receiver circuit response time to be longer than said pulse duration.

7. The method of claim 6, wherein said adjusting of said receiver circuit response time is effected using a nonlinear device in said receiver circuit.

8. The method of claim 7, wherein said nonlinear device is a bandpass filter.

9. The method of claim 1, further comprising the steps of calibrating the method by:

- (d) transmitting said ultrasound pulse towards a calibration target of known calibration distance;
- (e) receiving a calibration echo pulse, having an amplitude envelope, from said calibration target; and
- (f) picking an arrival time of a maximum of said amplitude envelope of said calibration echo pulse.

10. The method of claim 9, wherein said receiving is effected using a receiver circuit having a saturation level and an amplification level, and wherein said transmission of said ultrasound towards a calibration target of known distance is effected at a plurality of said known distances, the method further comprising the steps of:

- (g) for each of said known distances, determining an optimal amplification level such that said maximum of said amplitude envelope of said calibration echo pulse is less than said saturation level, thereby creating a table of said optimal amplification level as a function of calibration distance; and
- (h) after receiving said echo pulse and identifying said arrival time of said maximum of said amplitude envelope, adjusting said amplification level, in accordance with said table of optimal amplification level as a

function of calibration distance, and in accordance with a measured distance inferred from said arrival time of said maximum of said amplitude envelope.

11. An ultrasonic rangefinder, comprising:
 - (a) a transmitter of ultrasound pulses;
 - (b) a sensor responsive to echoes of said pulses;
 - (c) an amplifier receiving signals from said sensor;
 - (d) an amplitude maximum detector receiving signals from said amplifier; and
 - (e) a timer, operationally connected to said transmitter and to said receiver, whereby a time delay, between a transmission of one of said ultrasound pulses and a response of said amplitude maximum detector, is measured.
12. The rangefinder of claim 11, further comprising:
 - (f) a nonlinear device, operationally interposed between said amplifier and said amplitude maximum detector.
13. The rangefinder of claim 12, wherein said nonlinear device is a bandpass filter.
14. The rangefinder of claim 11, further comprising:
 - (f) a feedback mechanism for adjusting said amplifier based on said time delay.
15. The rangefinder of claim 11, further comprising:
 - (f) an amplitude detector, operationally interposed between said amplifier and said amplitude maximum detector, whereby amplitudes of said signals from said amplifier are measured; and

- (g) a feedback mechanism for adjusting said amplifier based on said measured amplitudes.

16. The rangefinder of claim 11, wherein said transmitter includes a transducer for generating said ultrasound pulses.

17. The rangefinder of claim 16, wherein said transducer and said sensor are identical.

1/8

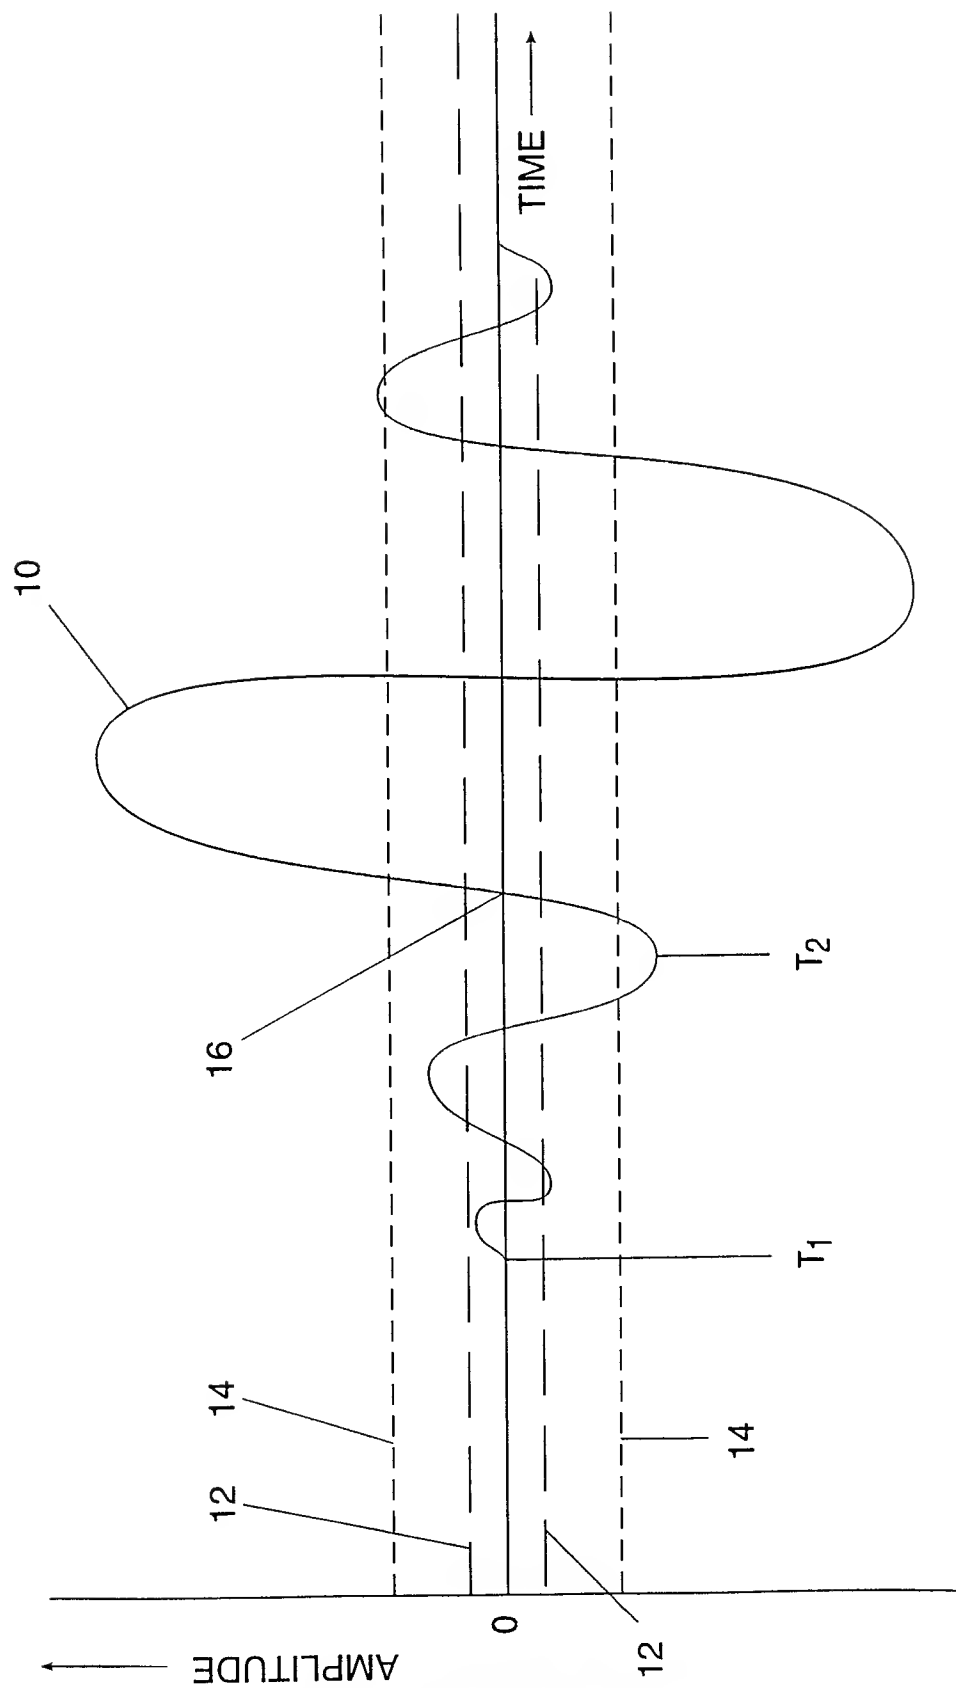


FIG. 1 (PRIOR ART)

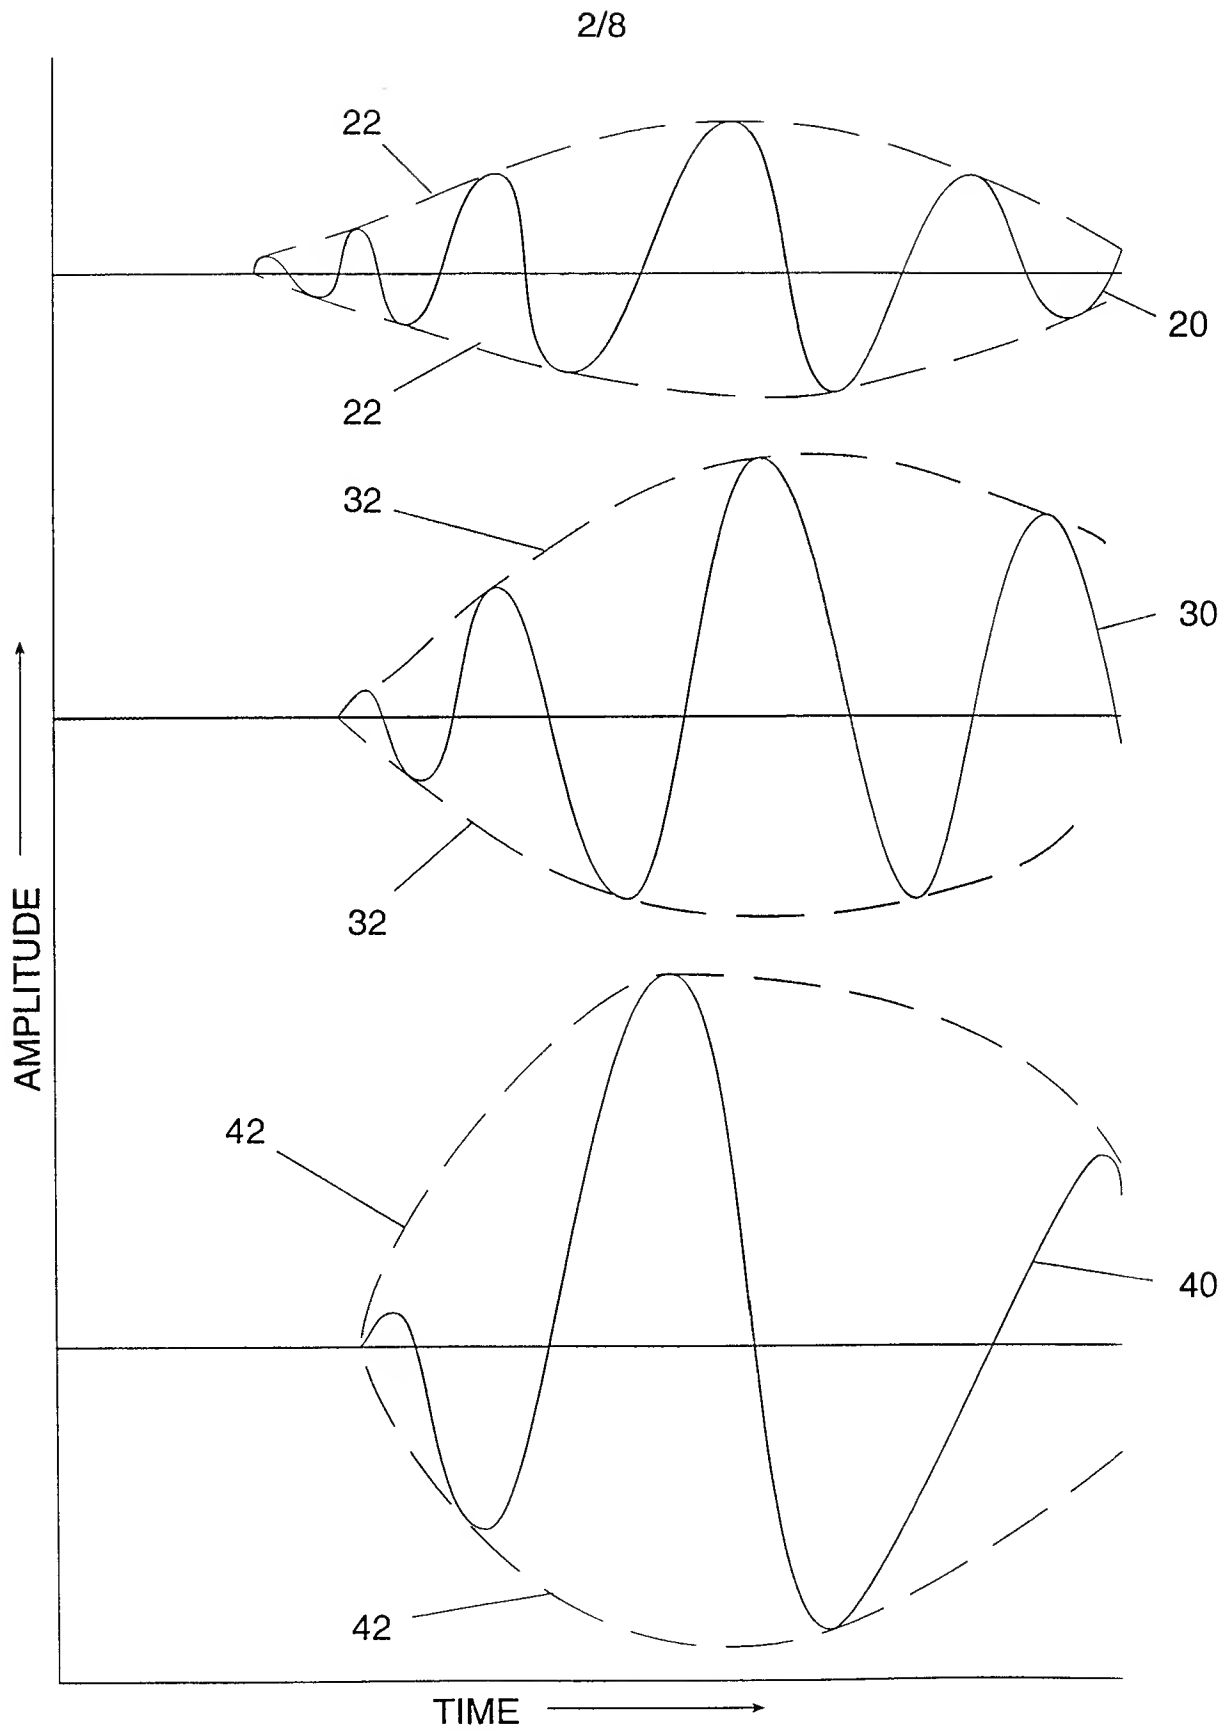


FIG. 2

3/8

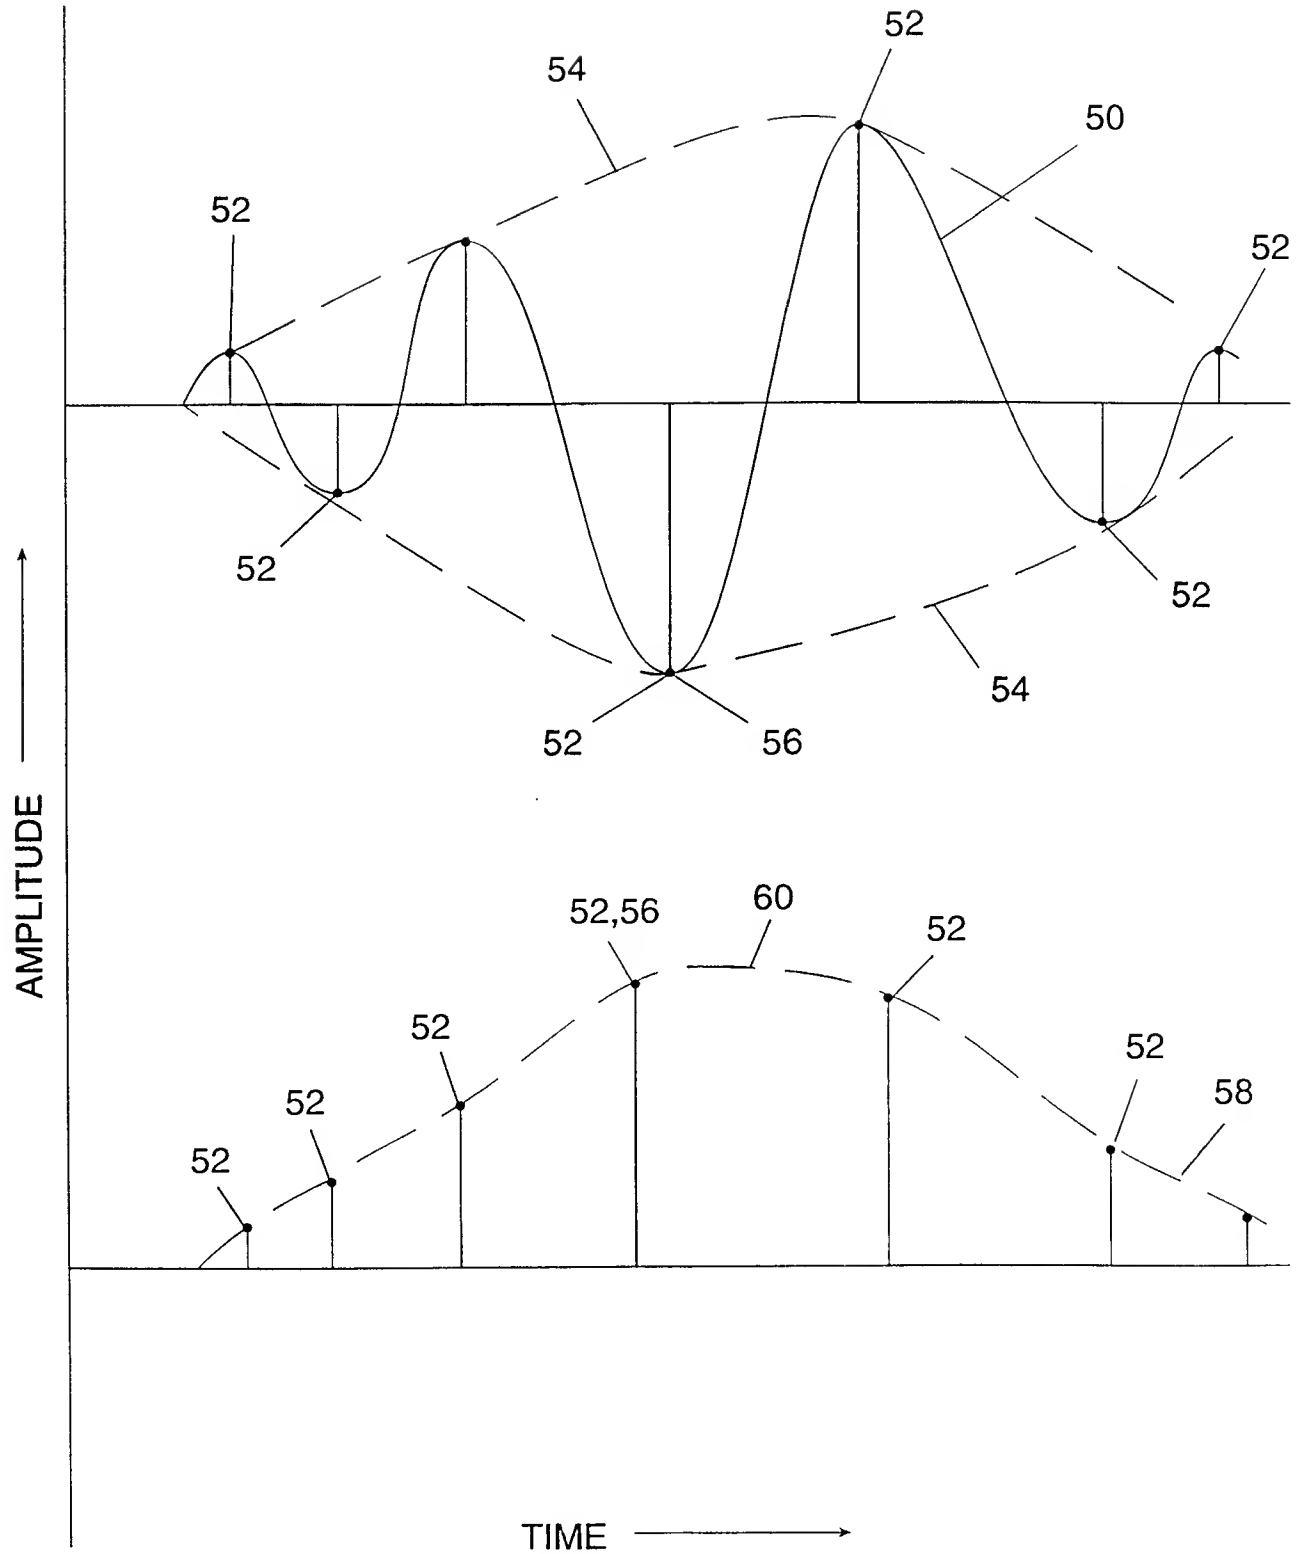


FIG. 3

SUBSTITUTE SHEET (RULE 26)

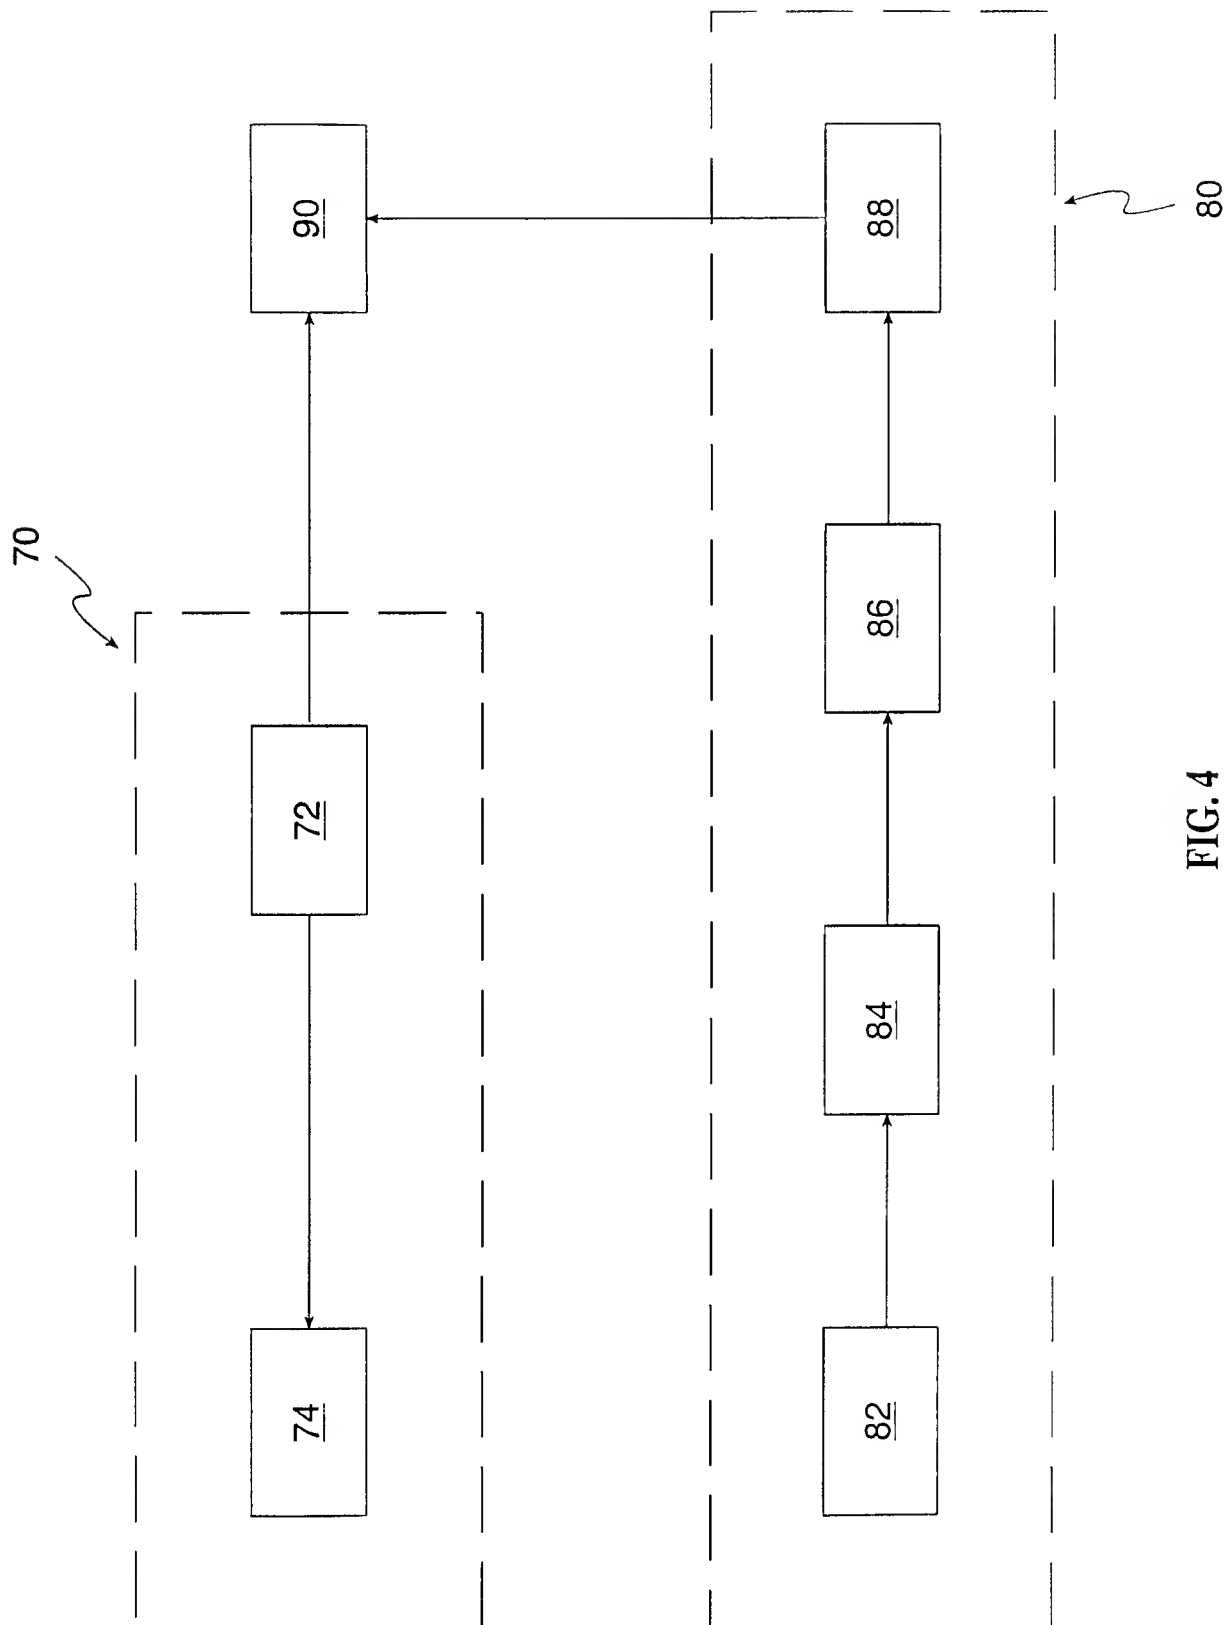


FIG. 4

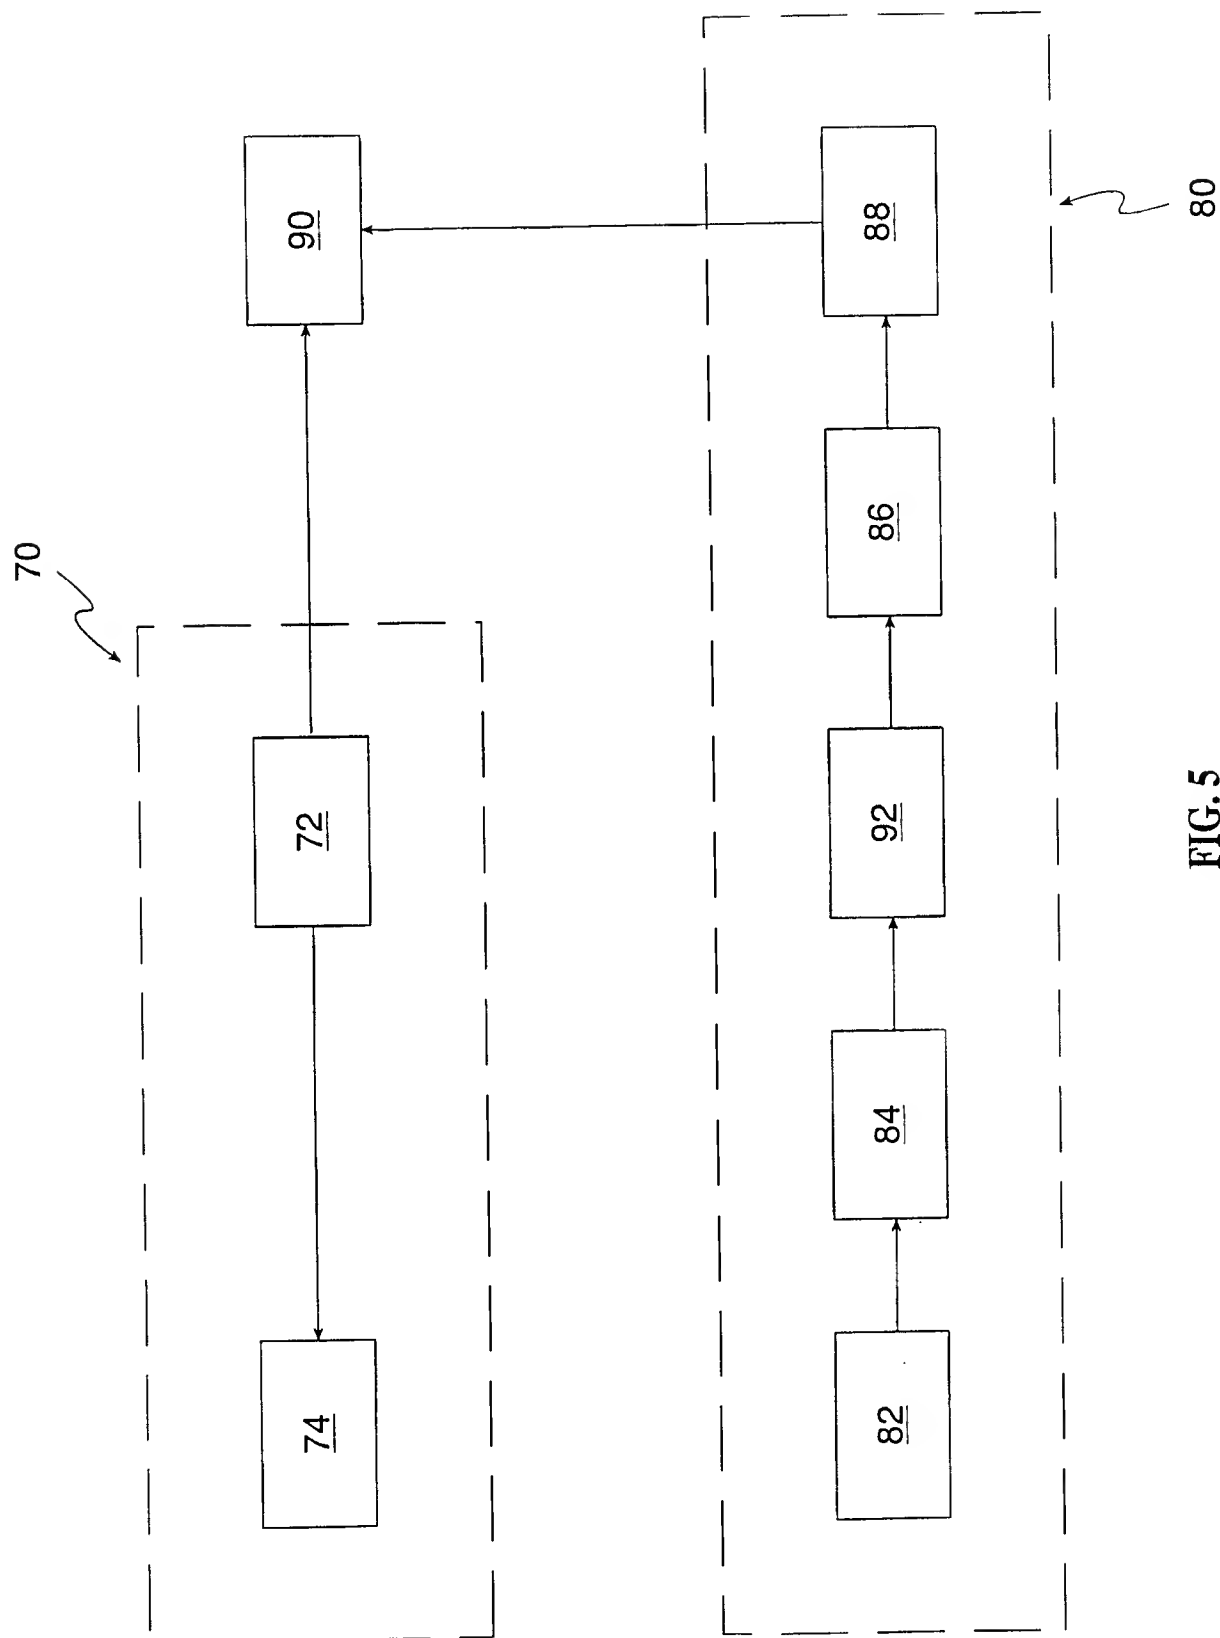


FIG. 5

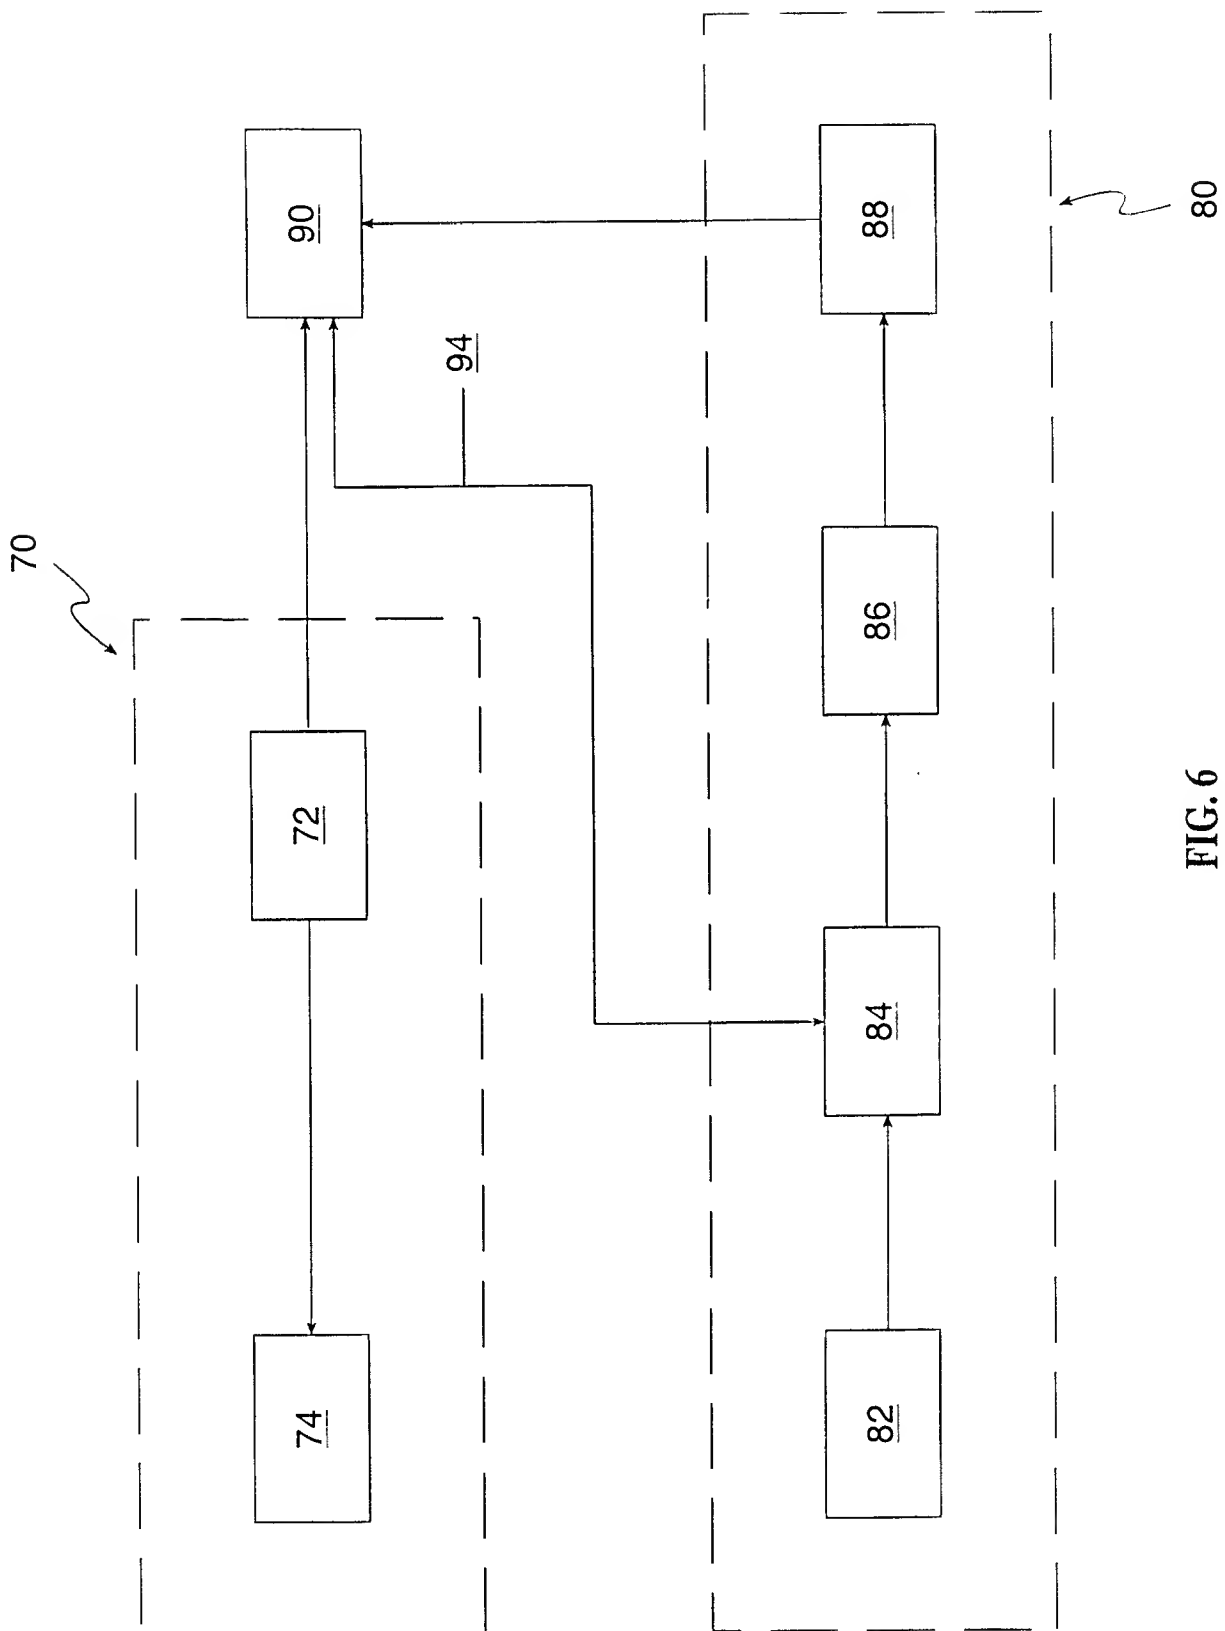


FIG. 6

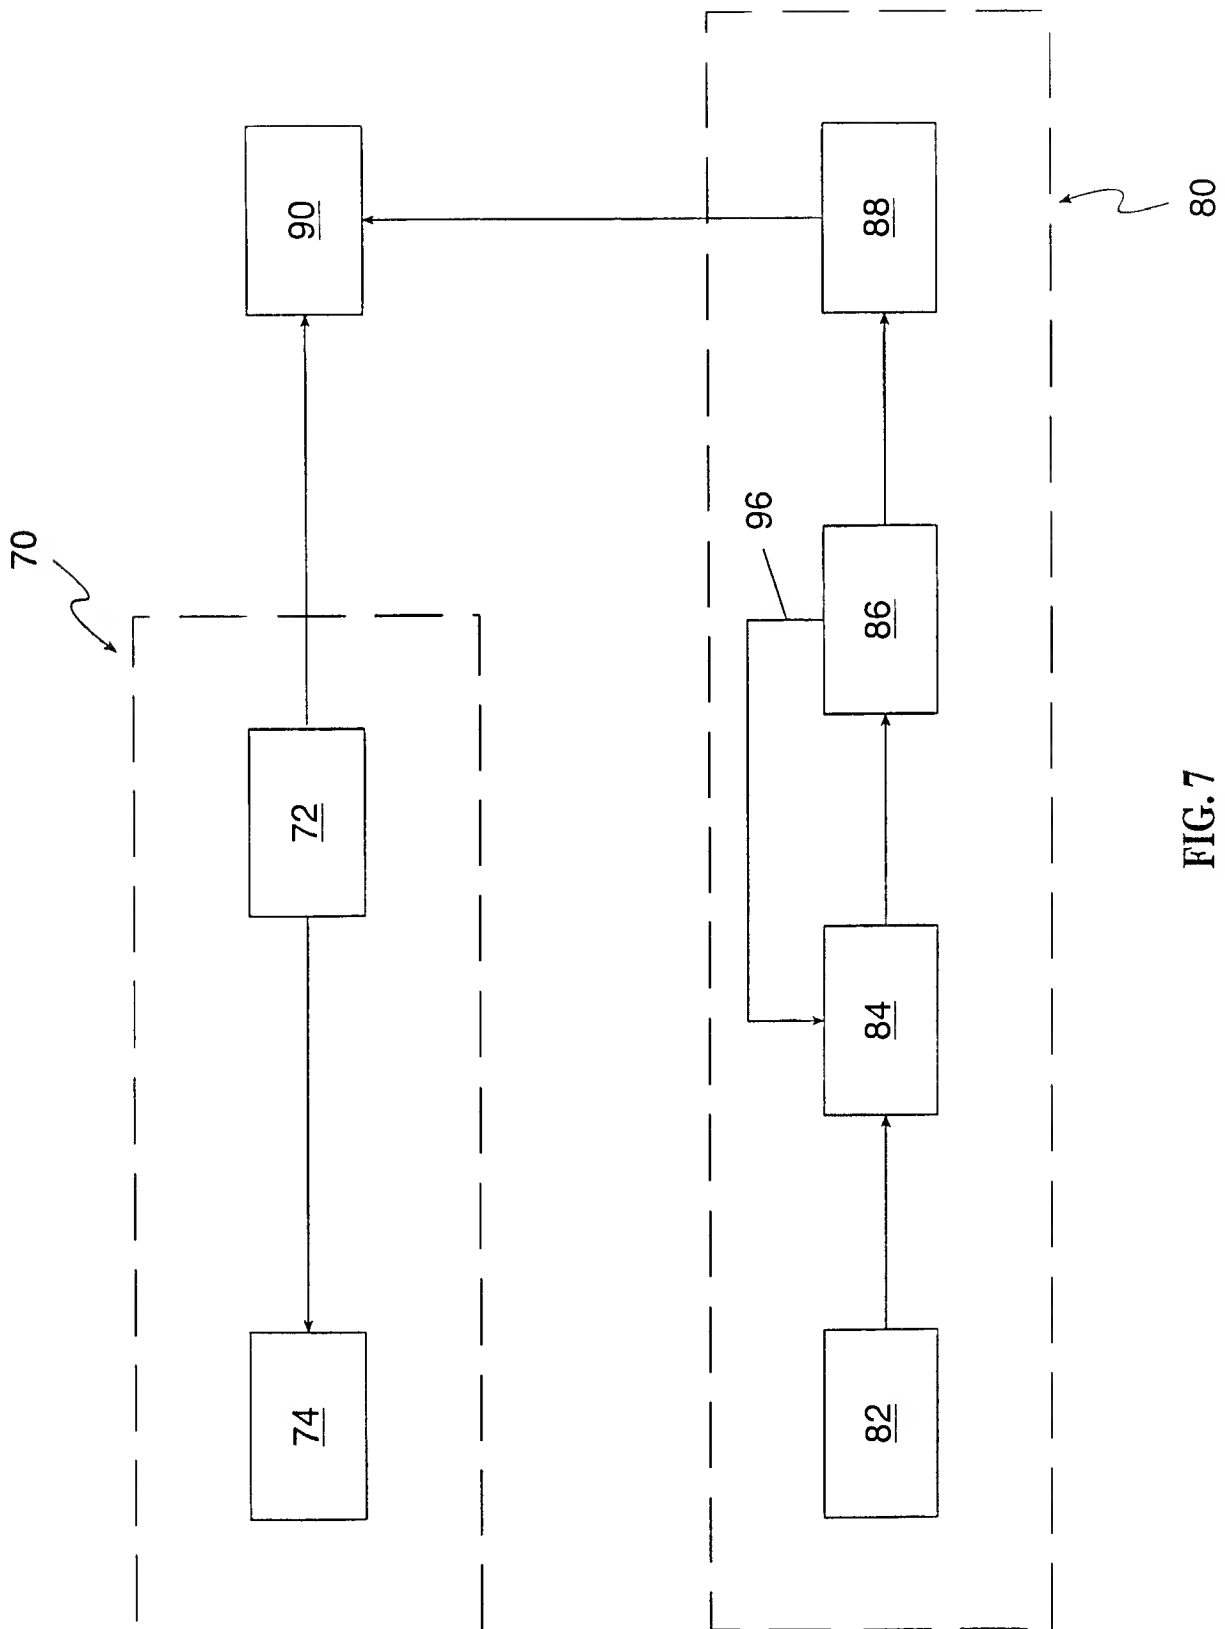


FIG. 7

8/8

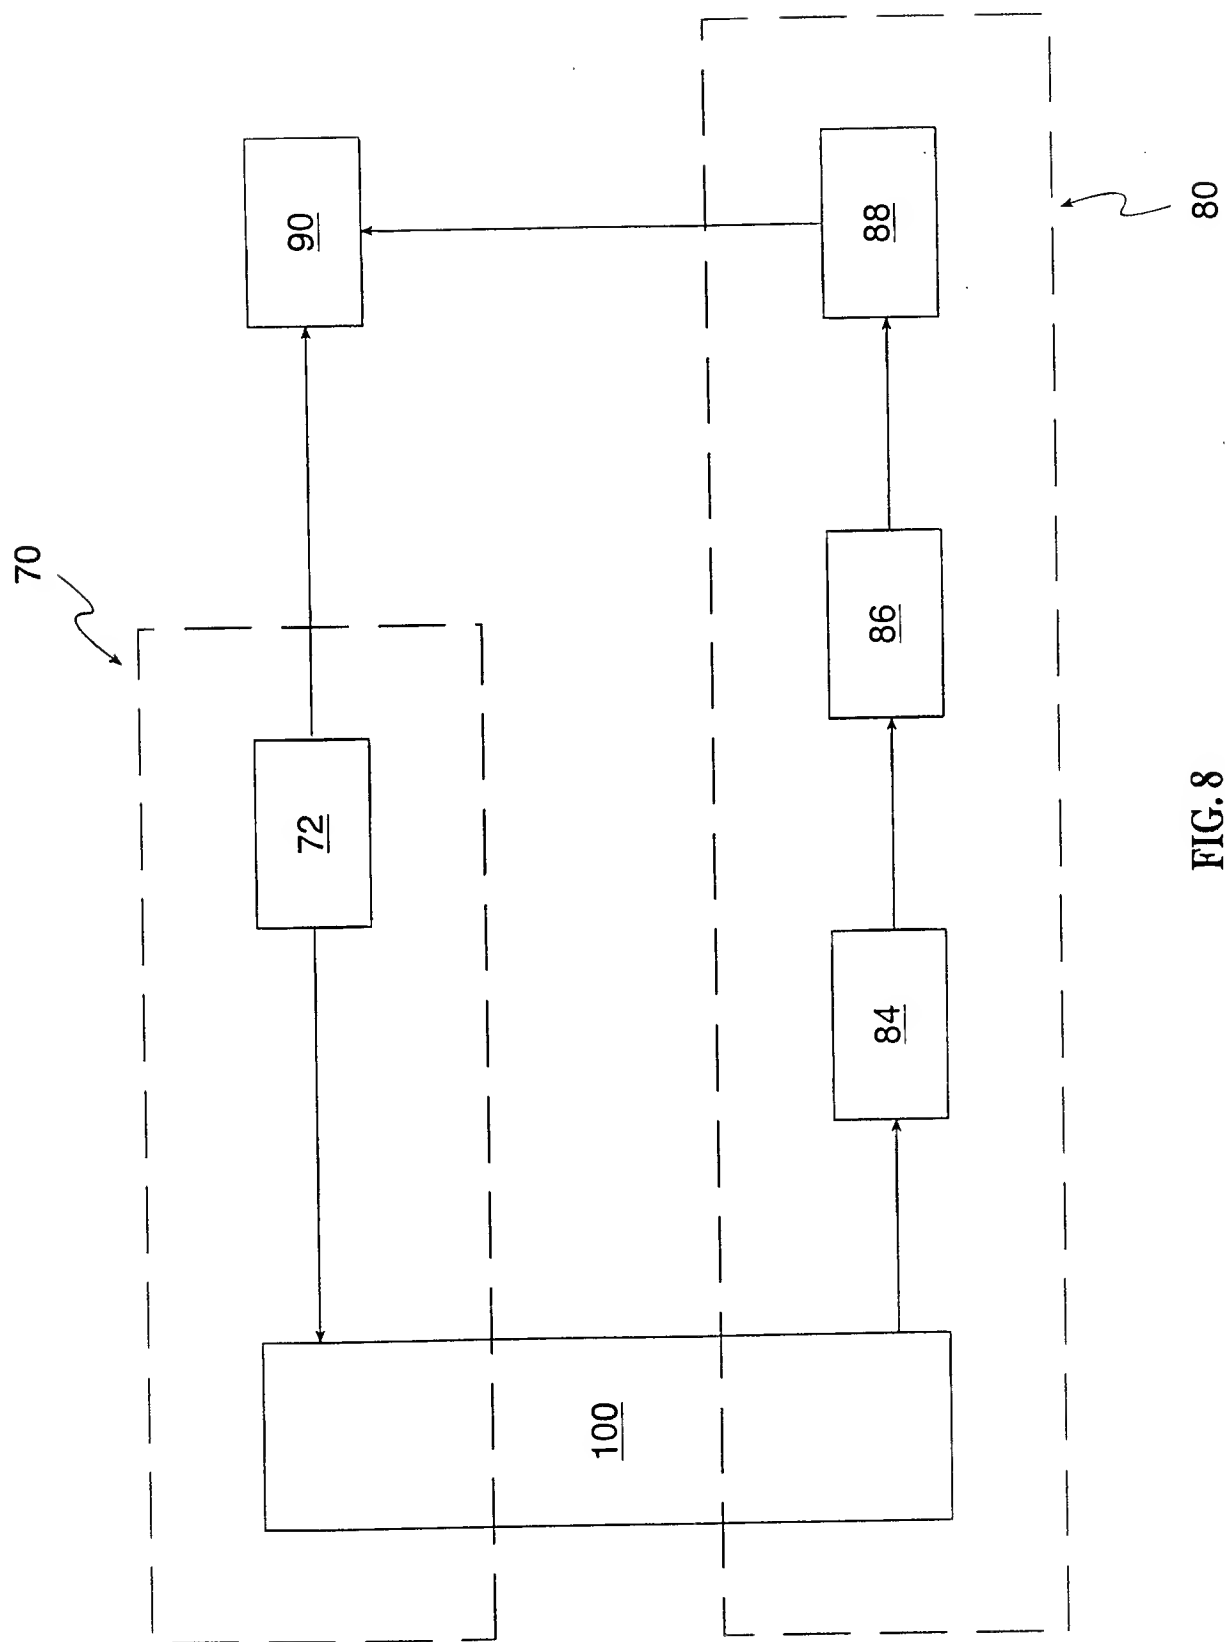


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/20940

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G01S 15/00

US CL :367/95, 97, 99, 908; 340/943, 435, 621

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 367/95, 97, 99, 908; 340/943, 435, 621

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4,428,237 A (ZEGGER et al) 31 January 1984, see entire document.	1-17
X	US 4,933,915 A (BOSTROM) 12 June 1990, see entire document.	1-17
X	US 4,972,386 A (LAU) 20 November 1990, see entire document.	1-17
X	US 5,394,750 A (MATZUK) 07 March 1995, see entire document.	1-17

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

29 JANUARY 1998

Date of mailing of the international search report

28 MAY 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

WOODROW ELDRED